


## LOW-POWER RS-485 LINE DRIVER AND RECEIVER PAIRS

### FEATURES


- Designed for High-Speed Multipoint Data Transmission Over Long Cables
- Operate With Pulse Durations as Low as 30 ns
- Low Supply Current . . . 5 mA Max
- Meet or Exceed the Requirements of ANSI Standard RS-485 and ISO 8482:1987(E)
- 3-State Outputs for Party-Line Buses
- Common-Mode Voltage Range of -7 V to 12 V
- Thermal Shutdown Protection Prevents Driver Damage From Bus Contention
- Positive and Negative Output Current Limiting
- Pin Compatible With the SN75ALS180

### DESCRIPTION

The SN55LBC180, SN65LBC180 and SN75LBC180 differential driver and receiver pairs are monolithic integrated circuits designed for bidirectional data communication over long cables that take on the characteristics of transmission lines. They are balanced, or differential, voltage mode devices that meet or exceed the requirements of industry standards ANSI RS-485 and ISO 8482:1987(E). These devices are designed using TI's proprietary LinBiCMOS™ with the low-power consumption of CMOS and the precision and robustness of bipolar transistors in the same circuit.

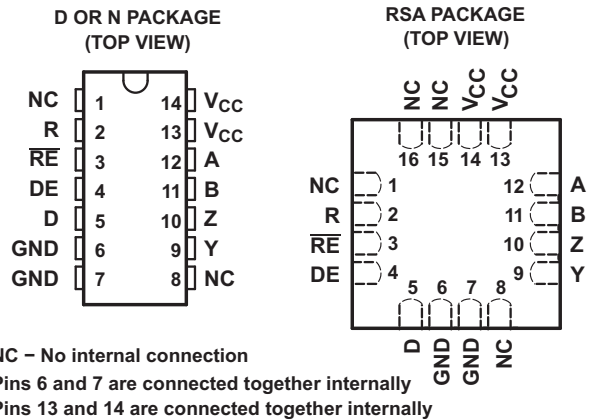

### logic diagram (positive logic)



### ORDERING INFORMATION

| T <sub>A</sub> | PACKAGE | PART NUMBER   | PART MARKING |
|----------------|---------|---------------|--------------|
| 0°C to 70°C    | PDIP    | SN75LBC180N   | SN75LBC180N  |
|                | SOIC    | SN75LBC180D   | 7LB180       |
|                | QFN     | SN75LBC180RSA | LB180        |
| -40°C to 85°C  | PDIP    | SN65LBC180N   | 65LBC180N    |
|                | SOIC    | SN65LBC180D   | 6LB180       |
|                | QFN     | SN65LBC180RSA | BL180        |
| -55°C to 125°C | QFN     | SN55LBC180RSA | SN55LBC180   |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LinBiCMOS is a trademark of Texas Instruments.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## DESCRIPTION (CONTINUED)

The SN55LBC180, SN65LBC180 and SN75LBC180 combine a differential line driver and receiver with 3-state outputs and operate from a single 5-V supply. The driver and receiver have active-high and active-low enables, respectively, which can be externally connected to function as a direction control. The driver differential outputs and the receiver differential inputs are connected to separate terminals for full-duplex operation and are designed to present minimum loading to the bus whether disabled or powered off ( $V_{CC} = 0$ ). These parts feature a wide common-mode voltage range making them suitable for point-to-point or multipoint data-bus applications.

The devices also provide positive and negative output-current limiting and thermal shutdown for protection from line fault conditions. The line driver shuts down at a junction temperature of approximately 172°C.

The SN75LBC180 is characterized for operation over the commercial temperature range of 0°C to 70°C. The SN65LBC180 is characterized over the industrial temperature range of –40°C to 85°C.

The SN55LBC180 is characterized for operation over the military temperature range of –55°C to 125°C.

FUNCTION TABLES<sup>(1)</sup>

| DRIVER                                    |              |             |   |
|-------------------------------------------|--------------|-------------|---|
| INPUT<br>D                                | ENABLE<br>DE | OUTPUTS     |   |
|                                           |              | Y           | Z |
| H                                         | H            | H           | L |
| L                                         | H            | L           | H |
| X                                         | L            | Z           | Z |
| RECEIVER                                  |              |             |   |
| DIFFERENTIAL INPUTS<br>A–B                | ENABLE<br>RE | OUTPUT<br>R |   |
| $V_{ID} \geq 0.2 \text{ V}$               | L            | H           |   |
| $-0.2 \text{ V} < V_{ID} < 0.2 \text{ V}$ | L            | ?           |   |
| $V_{ID} \leq -0.2 \text{ V}$              | L            | L           |   |
| X                                         | H            | Z           |   |
| Open circuit                              | L            | H           |   |

(1) H = high level, L = low level, ? = Indeterminate, X = irrelevant,  
Z = high impedance (off)

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                  |                                                           |                                           | UNIT |
|------------------|-----------------------------------------------------------|-------------------------------------------|------|
| V <sub>CC</sub>  | Supply voltage range <sup>(2)</sup>                       | –0.3 to 7                                 | V    |
| V <sub>BUS</sub> | Bus voltage range (A, B, Y, Z) <sup>(2)</sup>             | –10 to 15                                 | V    |
|                  | Voltage range at D, R, DE, $\overline{RE}$ <sup>(2)</sup> | –0.3 to V <sub>CC</sub> + 0.5             | V    |
|                  | Continuous total power dissipation <sup>(3)</sup>         | Internally limited                        |      |
|                  | Total power dissipation                                   | See Dissipation Rating Table              |      |
| T <sub>stg</sub> | Storage temperature range                                 | –65 to 150                                | °C   |
| I <sub>O</sub>   | Receiver output current range                             | –50 to 50                                 | mA   |
| ESD              | Electrostatic discharge                                   | HBM (Human Body Model) EIA/JESD22-A114    | ±4   |
|                  |                                                           | MM (Machine Model) EIA/JESD22-A115        | 400  |
|                  |                                                           | CDM (Charge Device Model) EIA/JESD22-C101 | 1.5  |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to GND.
- (3) The maximum operating junction temperature is internally limited. Use the dissipation rating table to operate below this temperature.

## DISSIPATION RATING TABLE

| PACKAGE <sup>(1)</sup> | T <sub>A</sub> ≤ 25°C<br>POWER RATING | DERATING FACTOR<br>ABOVE T <sub>A</sub> = 25°C | T <sub>A</sub> = 70°C<br>POWER RATING | T <sub>A</sub> = 85°C<br>POWER RATING | T <sub>A</sub> = 125°C<br>POWER RATING |
|------------------------|---------------------------------------|------------------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|
| D                      | 950 mW                                | 7.6 mW/°C                                      | 608 mW                                | 494 mW                                | —                                      |
| N                      | 1150 mW                               | 9.2 mW/°C                                      | 736 mW                                | 598 mW                                | —                                      |
| RSA                    | 3333 mW                               | 26.67 mW/°C                                    | 2133 mW                               | 1733 mW                               | 400 mW                                 |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).

## RECOMMENDED OPERATING CONDITIONS

|                                                      |                                                         |                            | MIN               | NOM | MAX  | UNIT |
|------------------------------------------------------|---------------------------------------------------------|----------------------------|-------------------|-----|------|------|
| V <sub>CC</sub>                                      | Supply voltage                                          |                            | 4.75              | 5   | 5.25 | V    |
| V <sub>IH</sub>                                      | High-level input voltage                                | D, DE, and $\overline{RE}$ | 2                 |     |      | V    |
| V <sub>IL</sub>                                      | Low-level input voltage                                 | D, DE, and $\overline{RE}$ |                   |     | 0.8  | V    |
| V <sub>ID</sub>                                      | Differential input voltage                              |                            | –6 <sup>(1)</sup> |     | 6    | V    |
| V <sub>O</sub> , V <sub>I</sub> , or V <sub>IC</sub> | Voltage at any bus terminal (separately or common mode) | A, B, Y, or Z              | –7 <sup>(1)</sup> |     | 12   | V    |
| I <sub>OH</sub>                                      | High-level output current                               | Y or Z                     |                   |     | –60  | mA   |
|                                                      |                                                         | R                          |                   |     | –8   |      |
| I <sub>OL</sub>                                      | Low-level output current                                | Y or Z                     |                   |     | 60   | mA   |
|                                                      |                                                         | R                          |                   |     | 8    |      |
| T <sub>A</sub>                                       | Operating free-air temperature                          | SN55LBC180                 | –55               |     | 125  | °C   |
|                                                      |                                                         | SN65LBC180                 | –40               |     | 85   |      |
|                                                      |                                                         | SN75LBC180                 | 0                 |     | 70   |      |

- (1) The algebraic convention where the least positive (more negative) limit is designated minimum, is used in this data sheet for the differential input voltage, voltage at any bus terminal, operating temperature, input threshold voltage, and common-mode output voltage.

## DRIVER SECTION

### ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER        |                                                                   | TEST CONDITIONS                                           |                                       | MIN | TYP <sup>(1)</sup> | MAX       | UNIT          |
|------------------|-------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------|-----|--------------------|-----------|---------------|
| $V_{IK}$         | Input clamp voltage                                               | $I_I = -18 \text{ mA}$                                    |                                       |     |                    | -1.5      | V             |
| $ V_{OD} $       | Differential output voltage magnitude <sup>(2)</sup>              | $R_L = 54 \Omega$ ,<br>See <a href="#">Figure 1</a>       | SN55LBC180                            | 1   | 2.5                | 5         | V             |
|                  |                                                                   |                                                           | SN65LBC180                            | 1.1 | 2.5                | 5         |               |
|                  |                                                                   |                                                           | SN75LBC180                            | 1.5 | 2.5                | 5         |               |
|                  |                                                                   | $R_L = 60 \Omega$ ,<br>See <a href="#">Figure 2</a>       | SN55LBC180                            | 1   | 2.5                | 5         |               |
|                  |                                                                   |                                                           | SN65LBC180                            | 1.1 | 2                  | 5         |               |
|                  |                                                                   |                                                           | SN75LBC180                            | 1.5 | 2                  | 5         |               |
| $\Delta V_{OD} $ | Change in magnitude of differential output voltage <sup>(3)</sup> | See <a href="#">Figure 1</a> and <a href="#">Figure 2</a> |                                       |     |                    | $\pm 0.2$ | V             |
| $V_{OC}$         | Common-mode output voltage                                        | $R_L = 54 \Omega$ ,<br>See <a href="#">Figure 1</a>       |                                       | 1   | 2.5                | 3         | V             |
| $\Delta V_{OC} $ | Change in magnitude of common-mode output voltage <sup>(3)</sup>  |                                                           |                                       |     |                    | $\pm 0.2$ | V             |
| $I_O$            | Output current with power off                                     | $V_{CC} = 0$ ,                                            | $V_O = -7 \text{ V to } 12 \text{ V}$ |     |                    | $\pm 100$ | $\mu\text{A}$ |
| $I_{OZ}$         | High-impedance-state output current                               | $V_O = -7 \text{ V to } 12 \text{ V}$                     |                                       |     |                    | $\pm 100$ | $\mu\text{A}$ |
| $I_{IH}$         | High-level input current                                          | $V_I = 2.4 \text{ V}$                                     |                                       |     |                    | 100       | $\mu\text{A}$ |
| $I_{IL}$         | Low-level input current                                           | $V_I = 0.4 \text{ V}$                                     |                                       |     |                    | 100       | $\mu\text{A}$ |
| $I_{OS}$         | Short-circuit output current                                      | $-7 \text{ V} \leq V_O \leq 12 \text{ V}$                 |                                       |     |                    | $\pm 250$ | mA            |
| $I_{CC}$         | Supply current                                                    | Receiver disabled                                         | Outputs enabled                       |     |                    | 5         | mA            |
|                  |                                                                   |                                                           | Outputs disabled                      |     |                    | 3         |               |

(1) All typical values are at  $V_{CC} = 5 \text{ V}$  and  $T_A = 25^\circ\text{C}$ .

(2) The minimum  $V_{OD}$  specification may not fully comply with ANSI RS-485 at operating temperatures below  $0^\circ\text{C}$ . System designers should take the possibly lower output signal into account in determining the maximum signal-transmission distance.

(3)  $\Delta|V_{OD}|$  and  $\Delta|V_{OC}|$  are the changes in the steady-state magnitude of  $V_{OD}$  and  $V_{OC}$ , respectively, that occur when the input is changed from a high level to a low level.

### SWITCHING CHARACTERISTICS

$V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER   |                                     | TEST CONDITIONS                                     |                              | MIN | TYP | MAX | UNIT |
|-------------|-------------------------------------|-----------------------------------------------------|------------------------------|-----|-----|-----|------|
| $t_{d(OD)}$ | Differential output delay time      | $R_L = 54 \Omega$ ,<br>See <a href="#">Figure 3</a> |                              | 7   | 12  | 18  | ns   |
| $t_{t(OD)}$ | Differential output transition time |                                                     |                              | 5   | 10  | 20  | ns   |
| $t_{PZH}$   | Output enable time to high level    | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 4</a> |     |     | 35  | ns   |
| $t_{PZL}$   | Output enable time to low level     | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 5</a> |     |     | 35  | ns   |
| $t_{PHZ}$   | Output disable time from high level | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 4</a> |     |     | 50  | ns   |
| $t_{PLZ}$   | Output disable time from low level  | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 5</a> |     |     | 35  | ns   |

### SWITCHING CHARACTERISTICS (SN55LBC180)

$V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER   |                                     | TEST CONDITIONS                                     |                              | MIN | TYP | MAX | UNIT |
|-------------|-------------------------------------|-----------------------------------------------------|------------------------------|-----|-----|-----|------|
| $t_{d(OD)}$ | Differential output delay time      | $R_L = 54 \Omega$ ,<br>See <a href="#">Figure 3</a> |                              |     | 15  |     | ns   |
| $t_{t(OD)}$ | Differential output transition time |                                                     |                              |     | 21  |     | ns   |
| $t_{PZH}$   | Output enable time to high level    | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 4</a> |     | 32  |     | ns   |
| $t_{PHZ}$   | Output disable time from high level |                                                     |                              |     | 55  |     |      |
| $t_{PZL}$   | Output enable time to low level     | $R_L = 110 \Omega$ ,                                | See <a href="#">Figure 5</a> |     | 32  |     | ns   |
| $t_{PLZ}$   | Output disable time from low level  |                                                     |                              |     | 20  |     |      |

## RECEIVER SECTION

### ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER                                            | TEST CONDITIONS                                                    | MIN  | TYP  | MAX      | UNIT          |
|------------------------------------------------------|--------------------------------------------------------------------|------|------|----------|---------------|
| $V_{IT+}$ Positive-going input threshold voltage     | $I_O = -8 \text{ mA}$                                              |      |      | 0.2      | V             |
| $V_{IT-}$ Negative-going input threshold voltage     | $I_O = 8 \text{ mA}$                                               | -0.2 |      |          | V             |
| $V_{hys}$ Hysteresis voltage ( $V_{IT+} - V_{IT-}$ ) |                                                                    |      | 45   |          | mV            |
| $V_{IK}$ Enable-input clamp voltage                  | $I_I = -18 \text{ mA}$                                             | -1.5 |      |          | V             |
| $V_{OH}$ High-level output voltage                   | $V_{ID} = 200 \text{ mV}$ , $I_{OH} = -8 \text{ mA}$               | 3.5  | 4.5  |          | V             |
| $V_{OL}$ Low-level output voltage                    | $V_{ID} = -200 \text{ mV}$ , $I_{OL} = 8 \text{ mA}$               |      | 0.3  | 0.5      | V             |
| $I_{OZ}$ High-impedance-state output current         | $V_O = 0 \text{ V to } V_{CC}$                                     |      |      | $\pm 20$ | $\mu\text{A}$ |
| $I_{IH}$ High-level enable-input current             | $V_{IH} = 2.4 \text{ V}$                                           | -50  |      |          | A             |
| $I_{IL}$ Low-level enable-input current              | $V_{IL} = 0.4 \text{ V}$                                           | -100 |      |          | $\mu\text{A}$ |
| $I_I$ Bus input current                              | $V_I = 12 \text{ V}$ , $V_{CC} = 5 \text{ V}$ , Other input at 0 V |      | 0.7  | 1        | mA            |
|                                                      | $V_I = 12 \text{ V}$ , $V_{CC} = 0 \text{ V}$ , Other input at 0 V |      | 0.8  | 1        |               |
|                                                      | $V_I = -7 \text{ V}$ , $V_{CC} = 5 \text{ V}$ , Other input at 0 V | -0.8 | -0.5 |          |               |
|                                                      | $V_I = -7 \text{ V}$ , $V_{CC} = 0 \text{ V}$ , Other input at 0 V | -0.8 | -0.5 |          |               |
| $I_{CC}$ Supply current                              | Driver disabled                                                    |      |      | 5        | mA            |
|                                                      |                                                                    |      |      | 3        |               |

### SWITCHING CHARACTERISTICS

 $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ 

| PARAMETER                                                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|-------------------------------------------------------------|------------------------------------------------------------|-----|-----|-----|------|
| $t_{PHL}$ Propagation delay time, high- to low-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$ , See Figure 6 | 11  | 22  | 33  | ns   |
| $t_{PLH}$ Propagation delay time, low- to high-level output |                                                            | 11  | 22  | 33  | ns   |
| $t_{sk(p)}$ Pulse skew ( $ t_{PHL} - t_{PLH} $ )            |                                                            |     | 3   | 6   | ns   |
| $t_t$ Transition time                                       |                                                            |     | 5   | 8   | ns   |
| $t_{PZH}$ Output enable time to high level                  | See Figure 7                                               |     |     | 35  | ns   |
| $t_{PZL}$ Output enable time to low level                   |                                                            |     |     | 30  | ns   |
| $t_{PHZ}$ Output disable time from high level               |                                                            |     |     | 35  | ns   |
| $t_{PLZ}$ Output disable time from low level                |                                                            |     |     | 30  | ns   |

### SWITCHING CHARACTERISTICS (SN55LBC180)

 $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ 

| PARAMETER                                                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|-------------------------------------------------------------|------------------------------------------------------------|-----|-----|-----|------|
| $t_{PHL}$ Propagation delay time, high- to low-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$ , See Figure 6 |     | 26  |     | ns   |
| $t_{PLH}$ Propagation delay time, low- to high-level output |                                                            |     | 23  |     | ns   |
| $t_{sk(p)}$ Pulse skew ( $ t_{PHL} - t_{PLH} $ )            |                                                            |     | 3   |     | ns   |
| $t_{sk(p)t}$ Transition time                                |                                                            |     | 4   |     | ns   |
| $t_{PZH}$ Output enable time to high level                  | See Figure 4                                               |     | 30  |     | ns   |
| $t_{PHZ}$ Output disable time from high level               |                                                            |     | 26  |     | ns   |
| $t_{PZL}$ Output enable time to low level                   |                                                            |     | 30  |     | ns   |
| $t_{PLZ}$ Output disable time from low level                |                                                            |     | 30  |     | ns   |

## PARAMETER MEASUREMENT INFORMATION

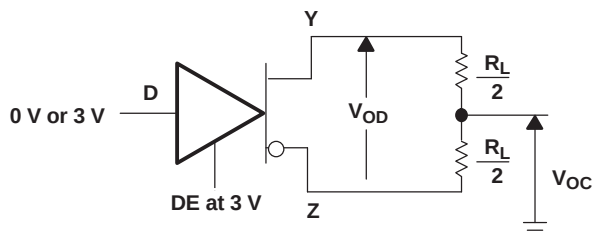


Figure 1. Differential and Common-Mode Output Voltages


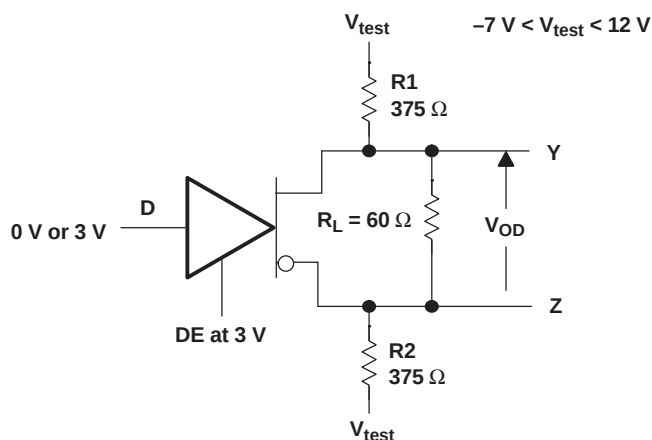


Figure 2. Driver  $V_{OD}$  Test Circuit

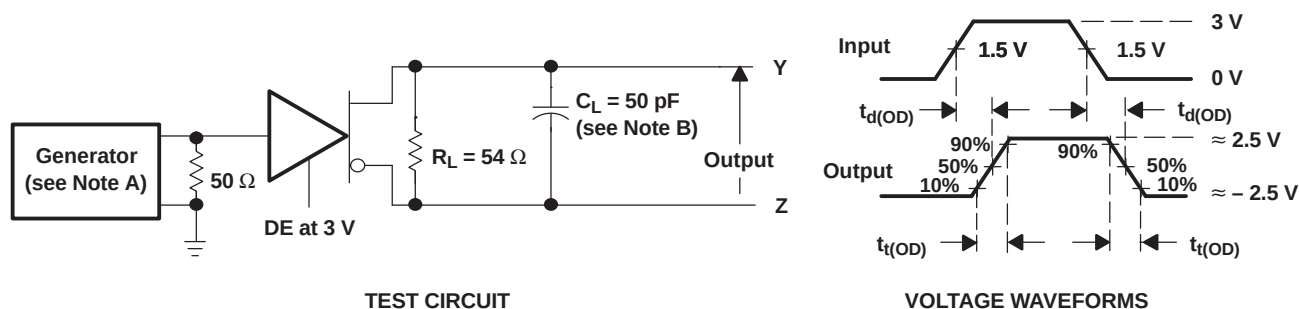

- NOTES: A. The input pulse is supplied by a generator having the following characteristics: PRR > 1 MHz, 50% duty cycle,  $t_r \leq 6$  ns,  $t_f \leq 6$  ns,  $Z_O = 50 \Omega$ .  
B.  $C_L$  includes probe and jig capacitance.

Figure 3. Driver Test Circuit and Differential Output Delay and Transition Time Voltage Waveforms

## PARAMETER MEASUREMENT INFORMATION (continued)

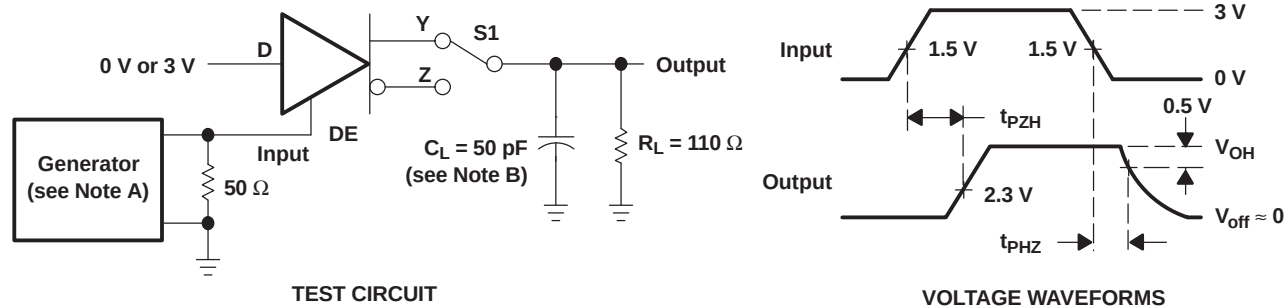


Figure 4. Driver Test Circuit and Enable and Disable Time Waveforms


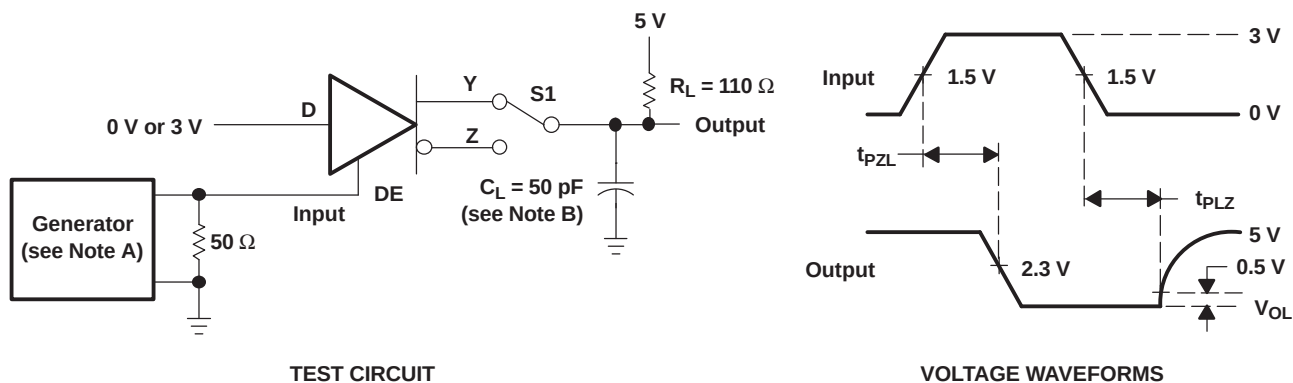



Figure 5. Driver Test Circuit and Enable and Disable Time Voltage Waveforms

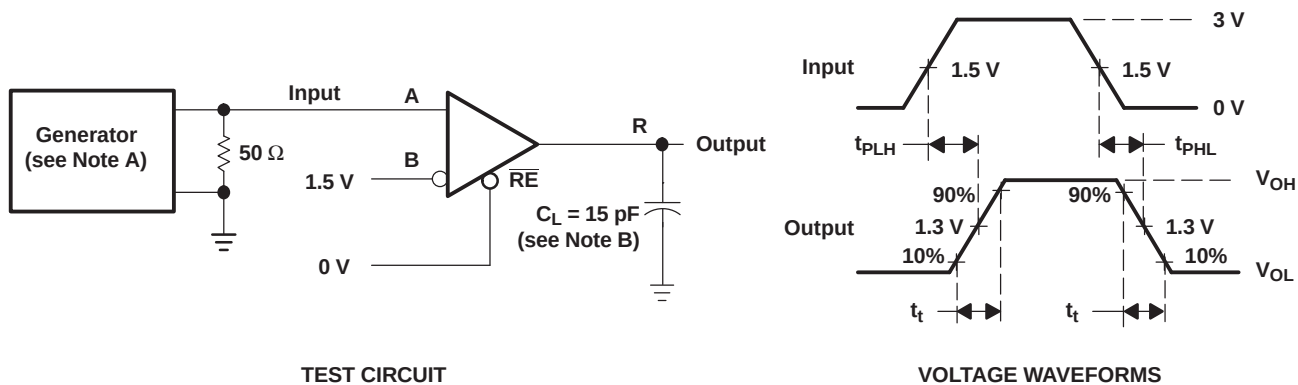

- NOTES: A. The input pulse is supplied by a generator having the following characteristics:  $PRR \leq 1 \text{ MHz}$ , 50% duty cycle,  $t_r \leq 6 \text{ ns}$ ,  $t_f \leq 6 \text{ ns}$ ,  $Z_O = 50 \Omega$ .  
B.  $C_L$  includes probe and jig capacitance.

Figure 6. Receiver Test Circuit and Propagation Delay Time Voltage Waveforms

## PARAMETER MEASUREMENT INFORMATION (continued)

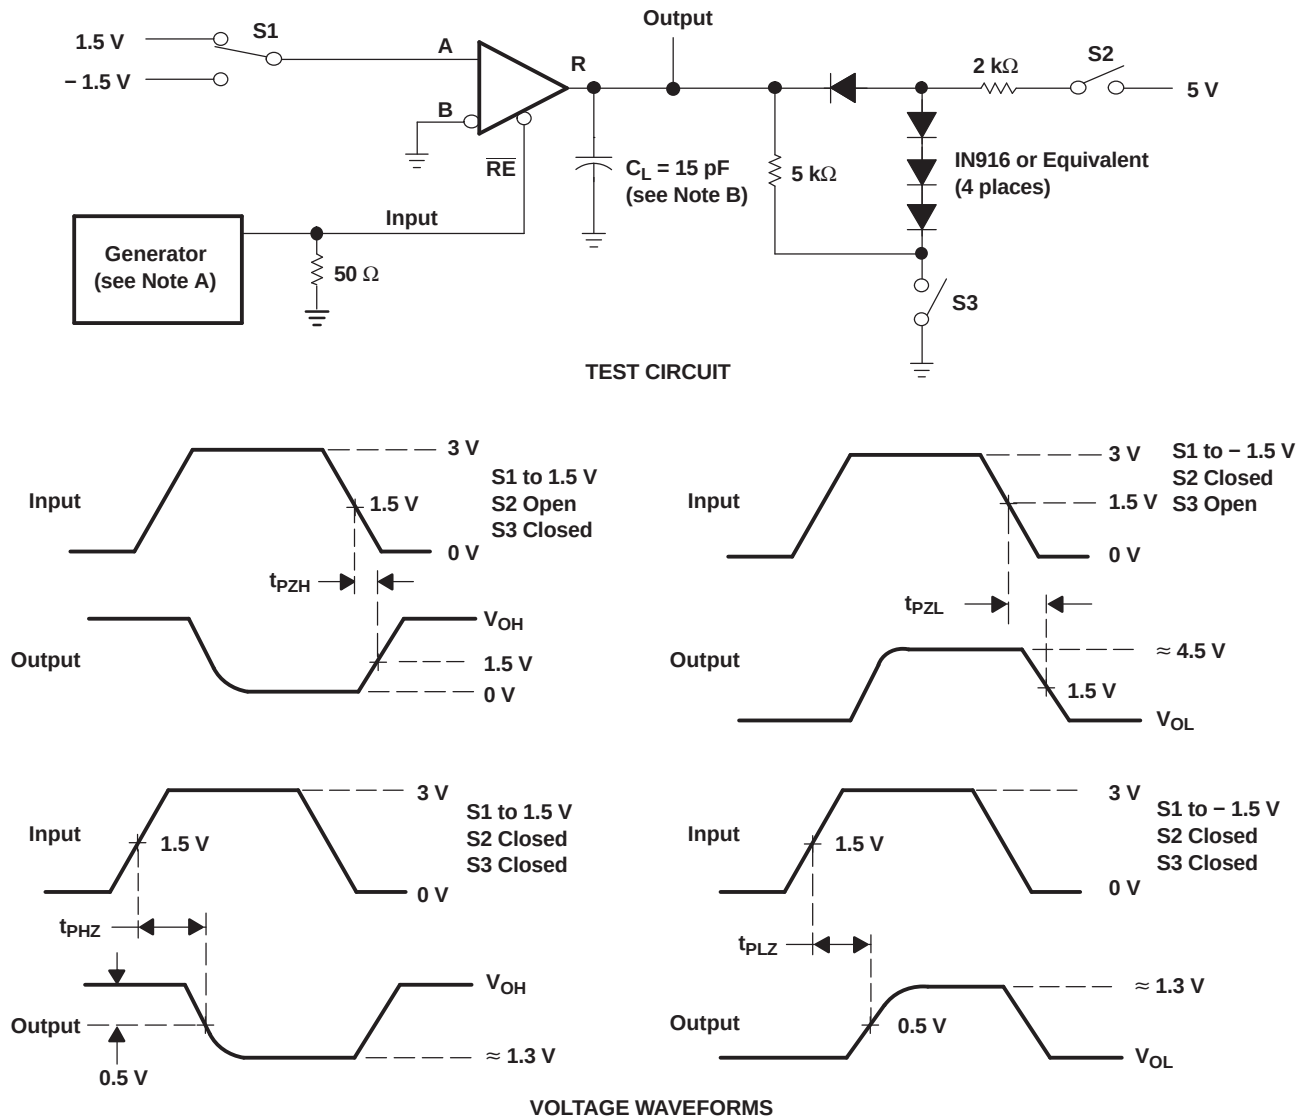


NOTES: A. The input pulse is supplied by a generator having the following characteristics:  $PRR \leq 1$  MHz, 50% duty cycle,  $t_r \leq 6$  ns,  $t_f \leq 6$  ns,  $Z_0 = 50 \Omega$ .  
B.  $C_L$  includes probe and jig capacitance.

**Figure 7. Receiver Output Enable and Disable Times**



## TYPICAL CHARACTERISTICS

### SCHEMATICS OF INPUTS AND OUTPUTS

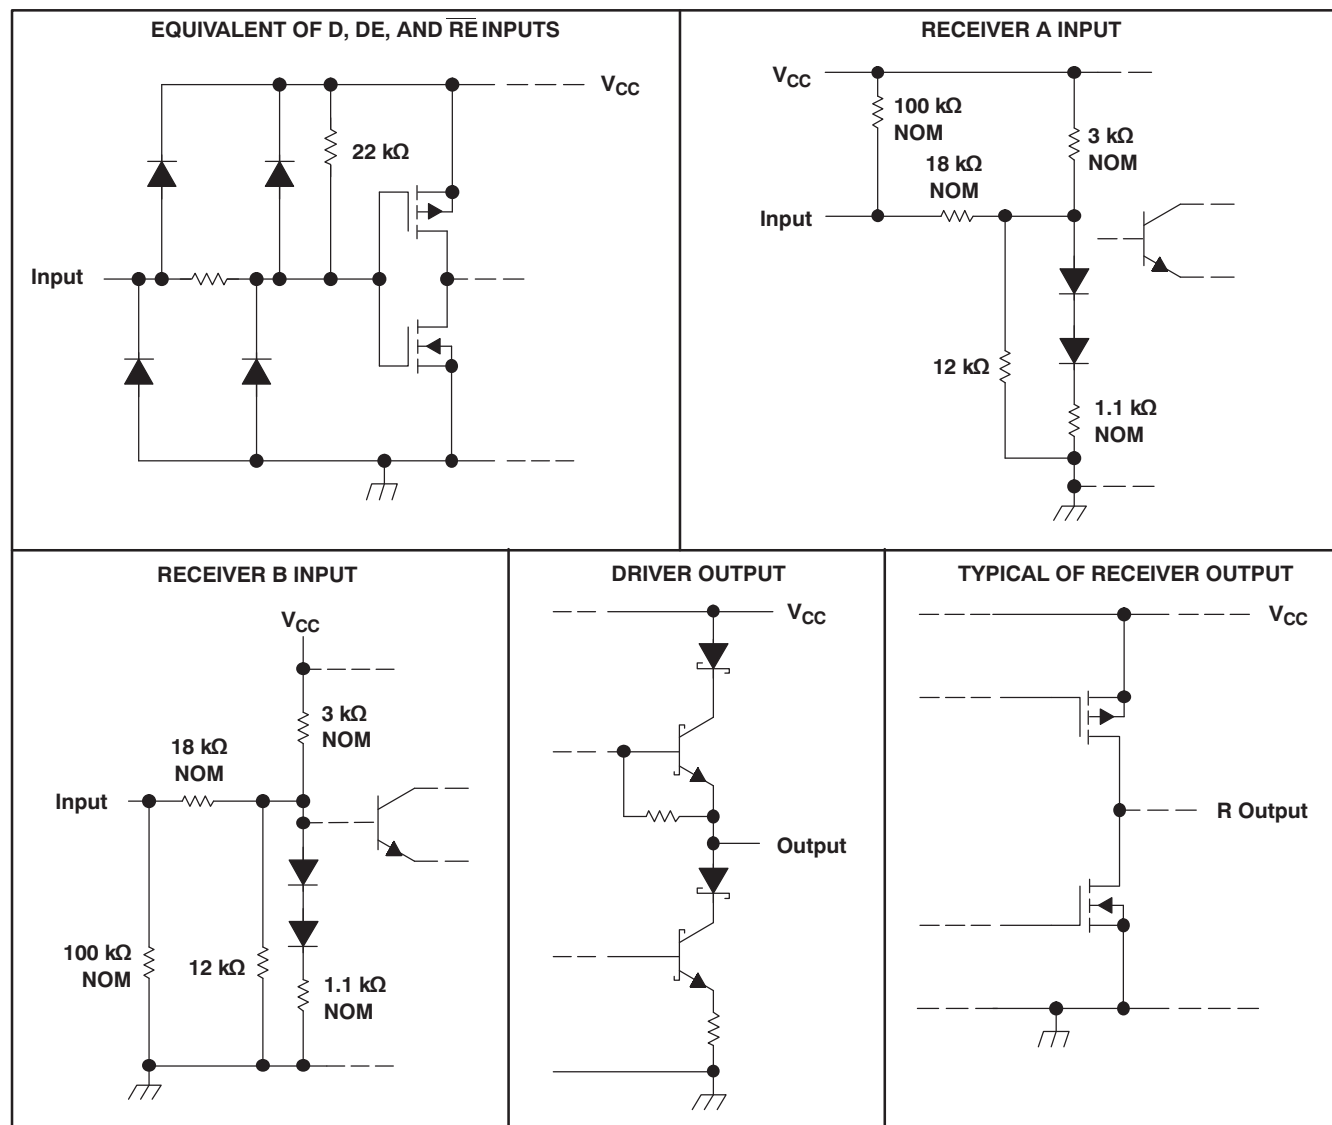

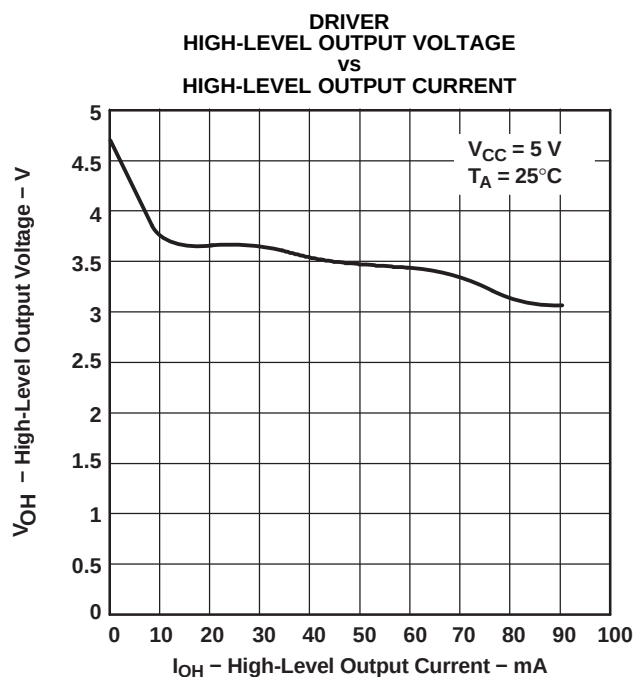


Figure 8.

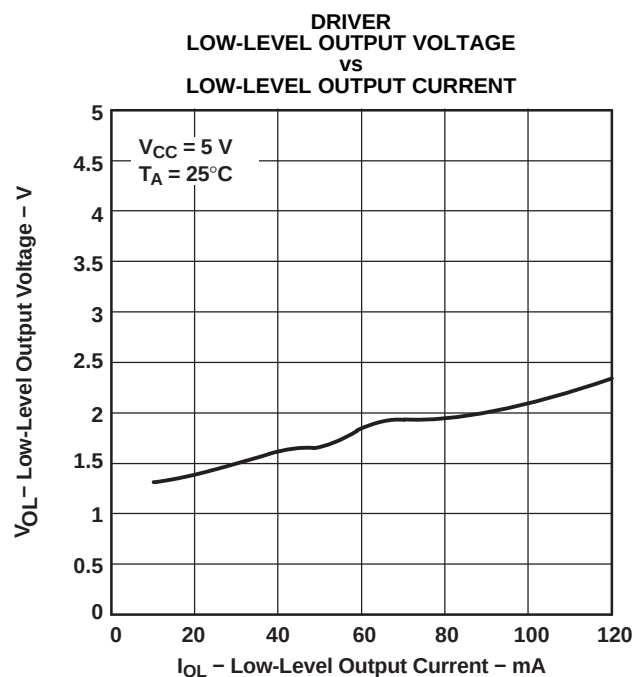


Figure 9.

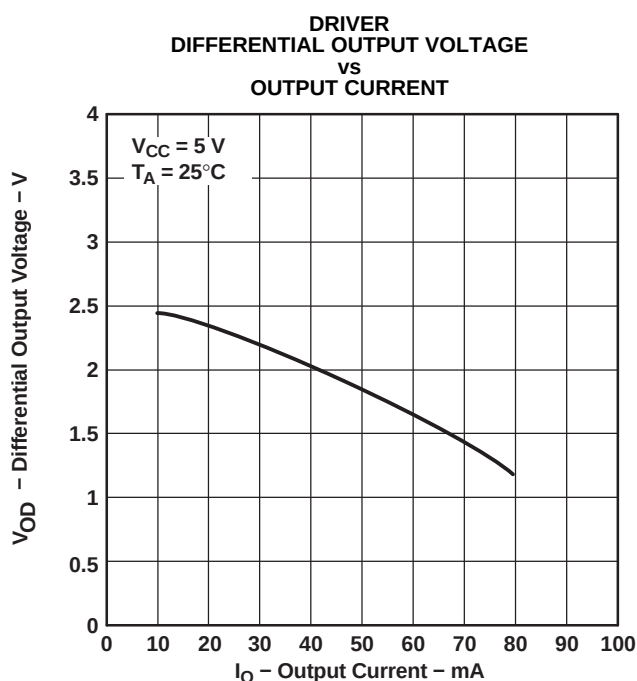


Figure 10.

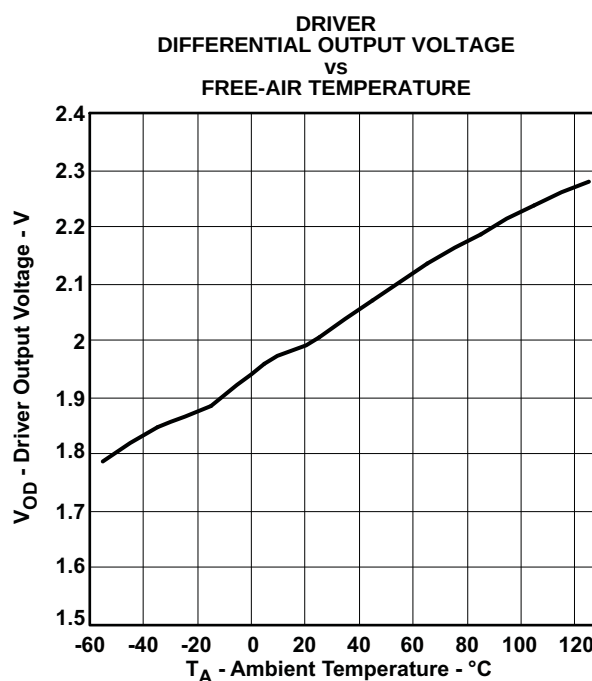


Figure 11.

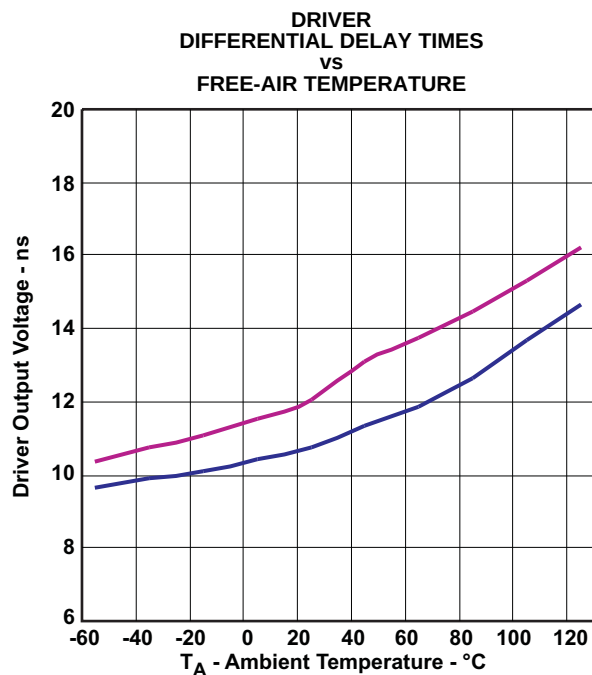


Figure 12.

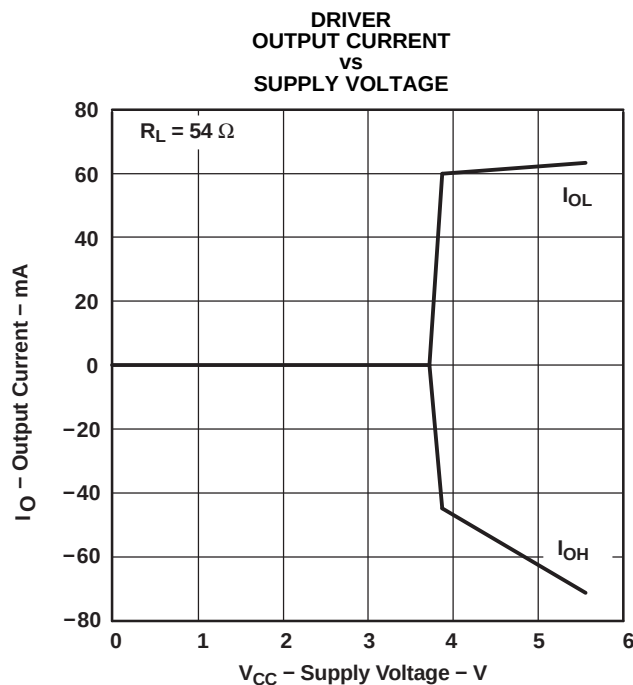


Figure 13.

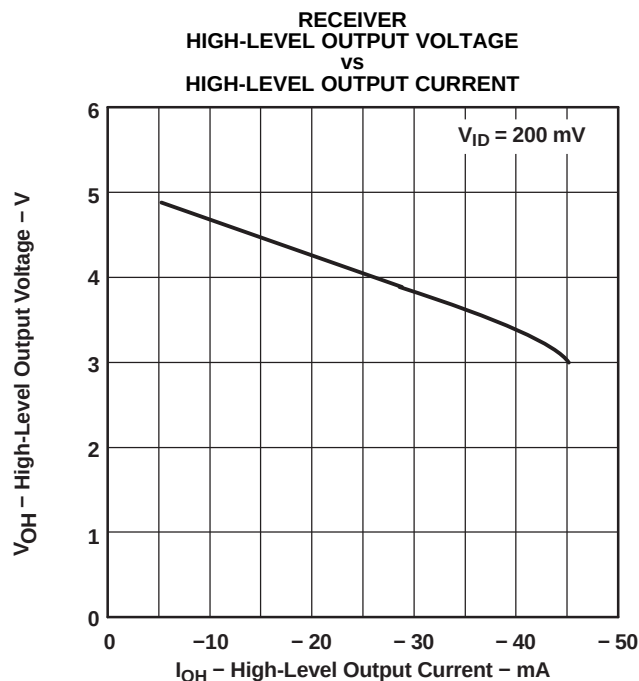


Figure 14.

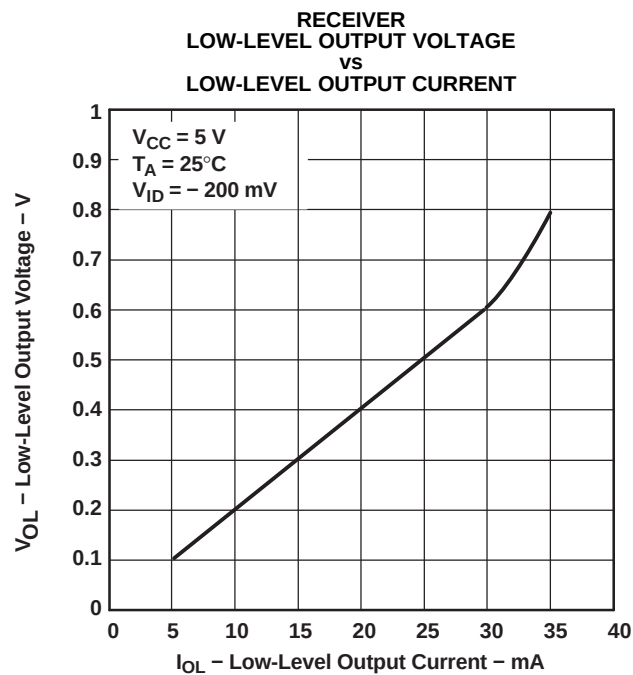


Figure 15.

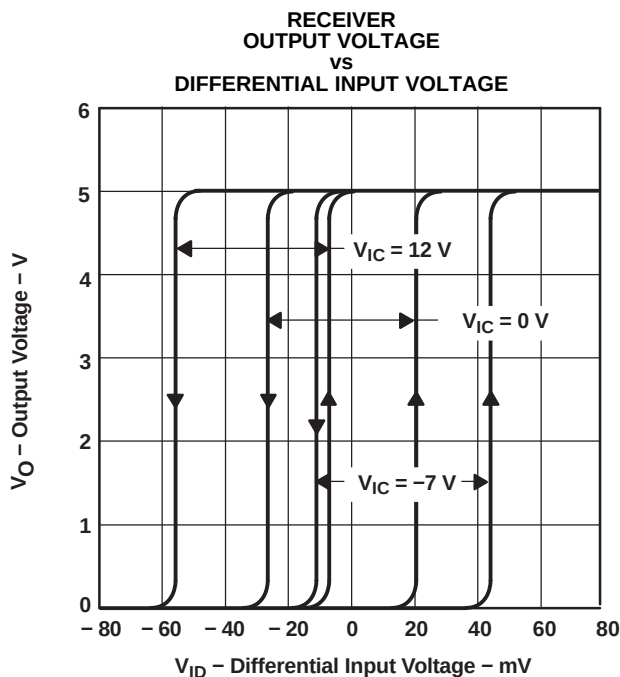


Figure 16.

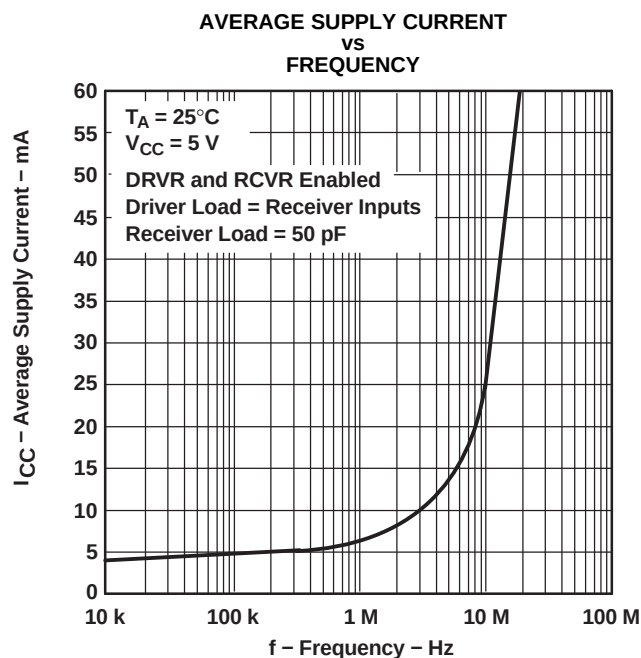


Figure 17.

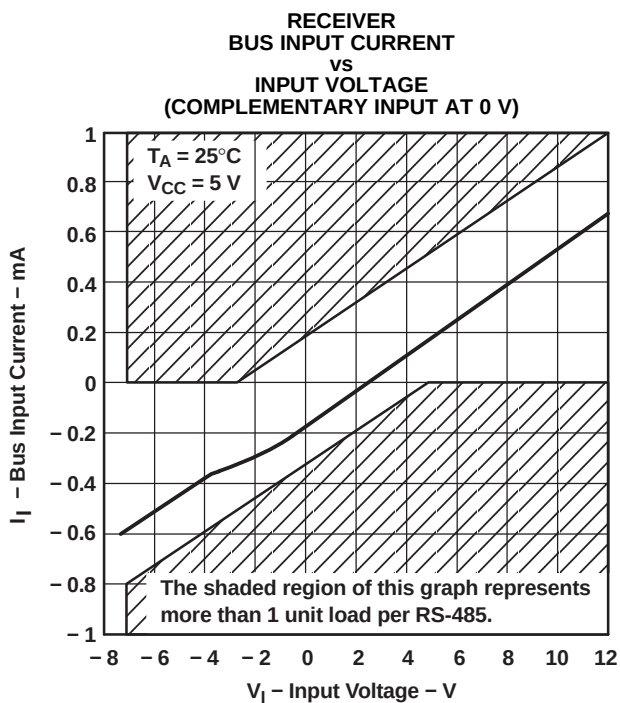


Figure 18.

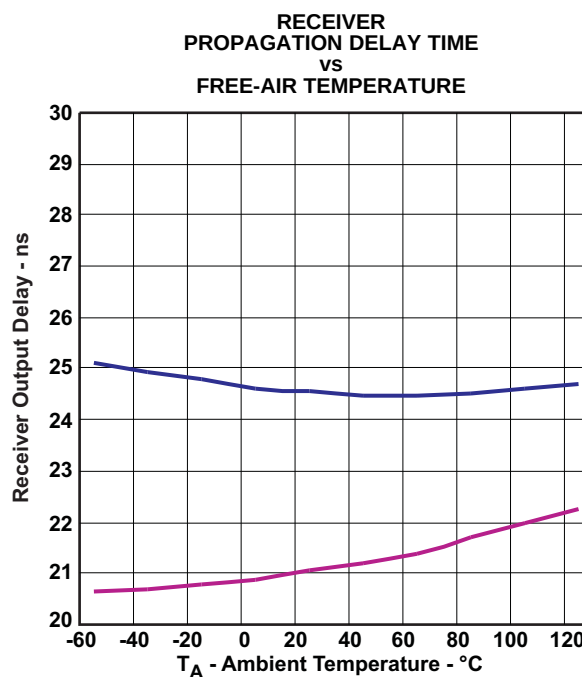
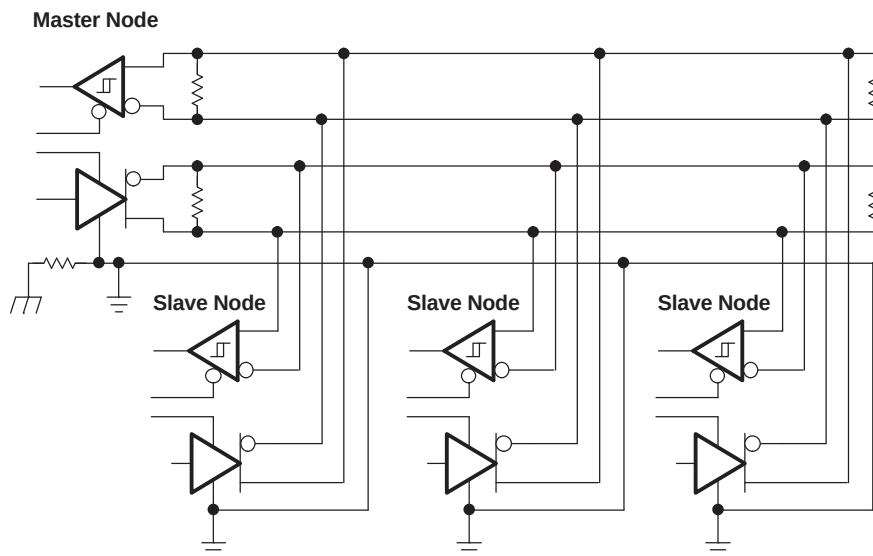


Figure 19.

## APPLICATION INFORMATION



**Figure 20. Full Duplex Application Circuit**

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN55LBC180RSAR   | ACTIVE                | QFN          | RSA             | 16   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN55LBC180RSAT   | ACTIVE                | QFN          | RSA             | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN65LBC180D      | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN65LBC180DG4    | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN65LBC180DR     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN65LBC180DRG4   | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN65LBC180N      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN65LBC180NE4    | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN65LBC180RSAR   | ACTIVE                | QFN          | RSA             | 16   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN65LBC180RSARG4 | ACTIVE                | QFN          | RSA             | 16   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN65LBC180RSAT   | ACTIVE                | QFN          | RSA             | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN65LBC180RSATG4 | ACTIVE                | QFN          | RSA             | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN75LBC180D      | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN75LBC180DG4    | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN75LBC180DR     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN75LBC180DRG4   | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN75LBC180N      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN75LBC180NE4    | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN75LBC180RSAR   | ACTIVE                | QFN          | RSA             | 16   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN75LBC180RSARG4 | ACTIVE                | QFN          | RSA             | 16   | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN75LBC180RSAT   | ACTIVE                | QFN          | RSA             | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |
| SN75LBC180RSATG4 | ACTIVE                | QFN          | RSA             | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-2-260C-1 YEAR          |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

---

**OBSELETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN55LBC180, SN65LBC180, SN75LBC180 :**

- Automotive: [SN65LBC180-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

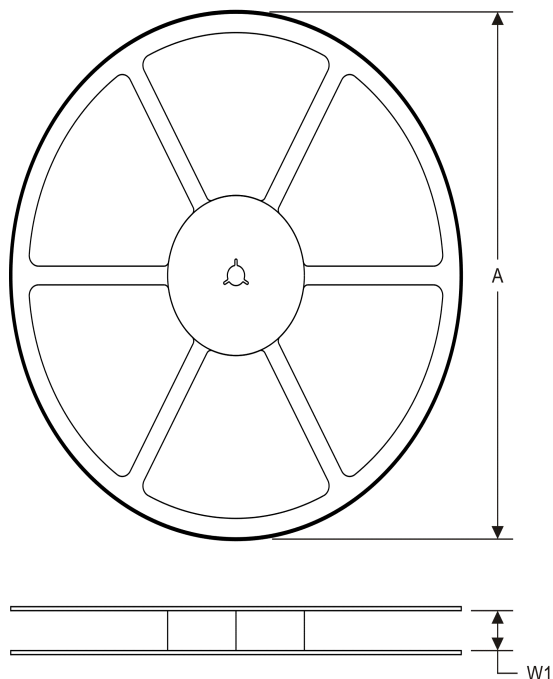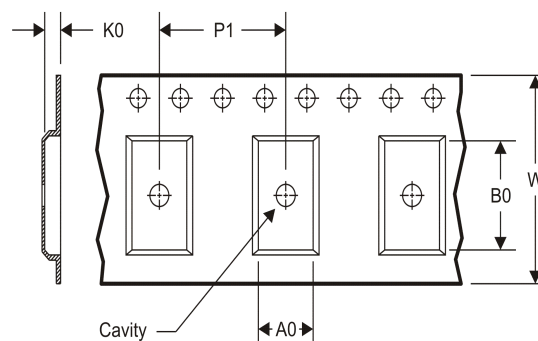**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |


**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN55LBC180RSAR | QFN          | RSA             | 16   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| SN55LBC180RSAT | QFN          | RSA             | 16   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| SN65LBC180DR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN65LBC180RSAR | QFN          | RSA             | 16   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| SN65LBC180RSAT | QFN          | RSA             | 16   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| SN75LBC180DR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN75LBC180RSAR | QFN          | RSA             | 16   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| SN75LBC180RSAT | QFN          | RSA             | 16   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |



## TAPE AND REEL BOX DIMENSIONS

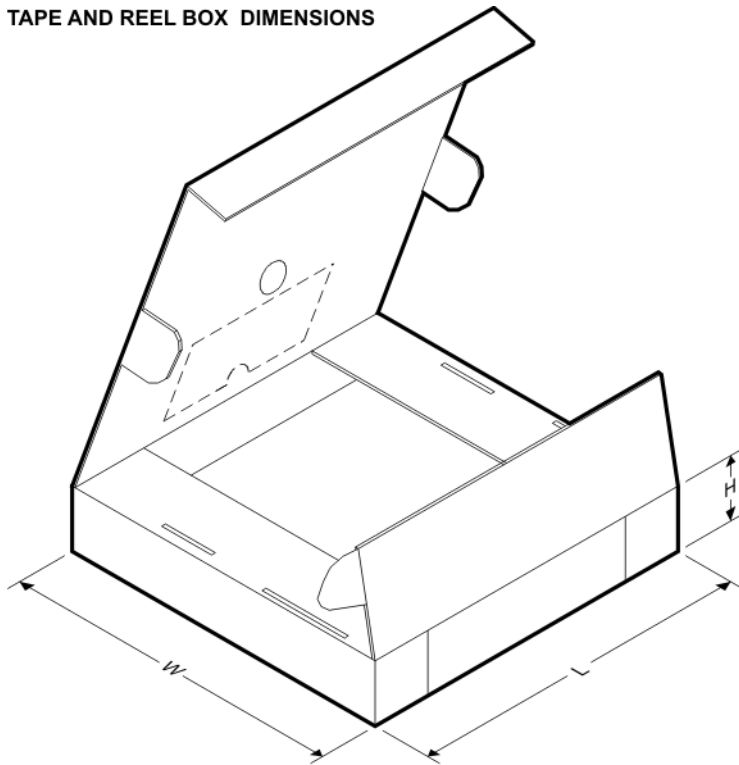


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN55LBC180RSAR | QFN          | RSA             | 16   | 3000 | 367.0       | 367.0      | 35.0        |
| SN55LBC180RSAT | QFN          | RSA             | 16   | 250  | 210.0       | 185.0      | 35.0        |
| SN65LBC180DR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| SN65LBC180RSAR | QFN          | RSA             | 16   | 3000 | 367.0       | 367.0      | 35.0        |
| SN65LBC180RSAT | QFN          | RSA             | 16   | 250  | 210.0       | 185.0      | 35.0        |
| SN75LBC180DR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| SN75LBC180RSAR | QFN          | RSA             | 16   | 3000 | 367.0       | 367.0      | 35.0        |
| SN75LBC180RSAT | QFN          | RSA             | 16   | 250  | 210.0       | 185.0      | 35.0        |


## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

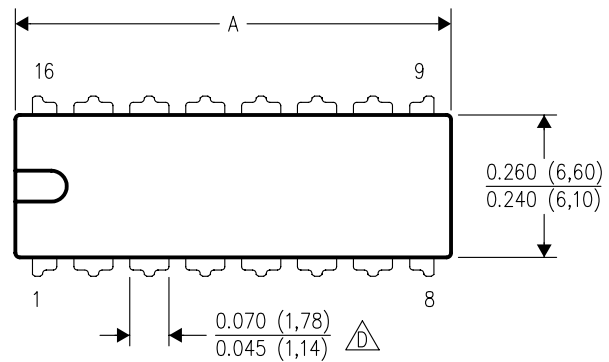

| PINS **             | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| DIM                 |                  |                  |                  |                  |
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

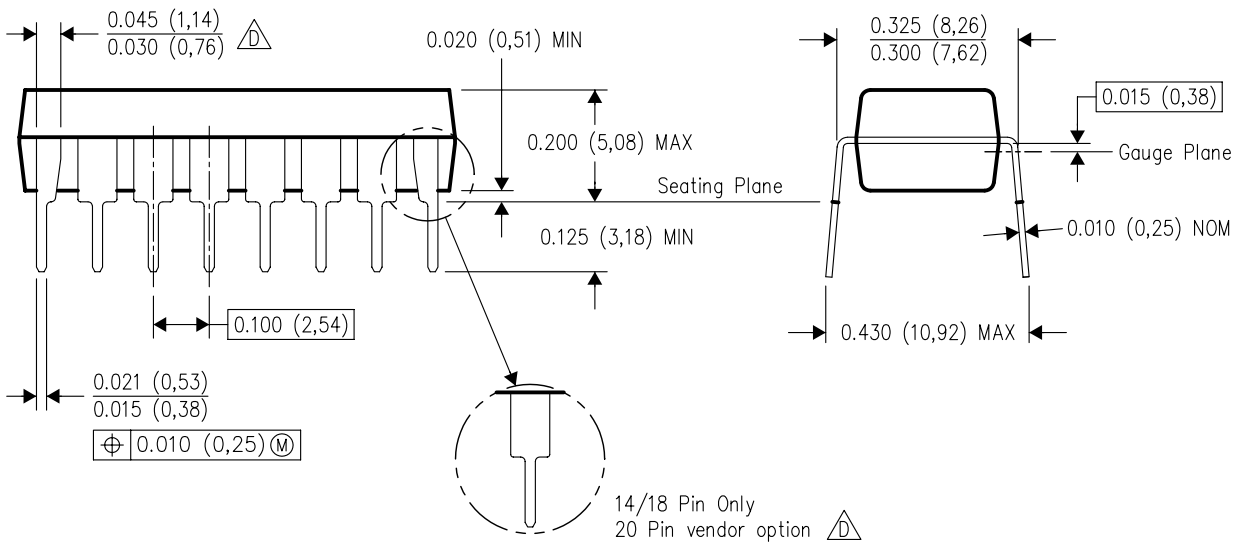


4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

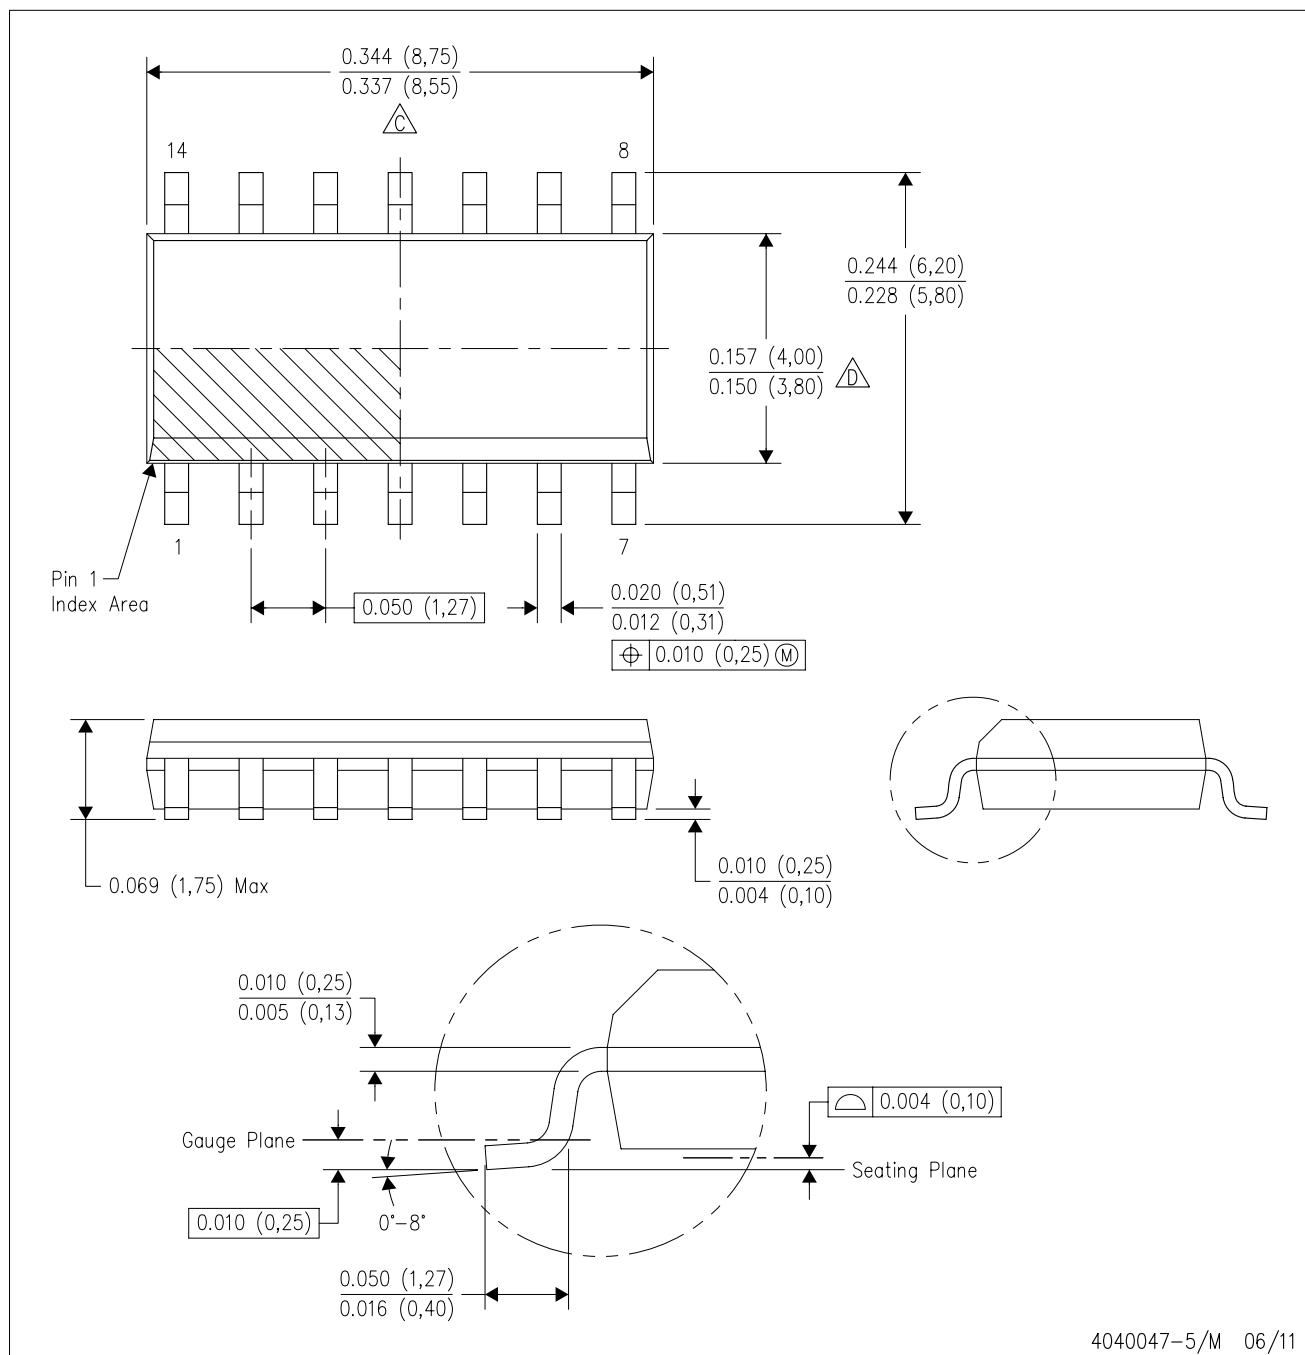


4040047-5/M 06/11

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

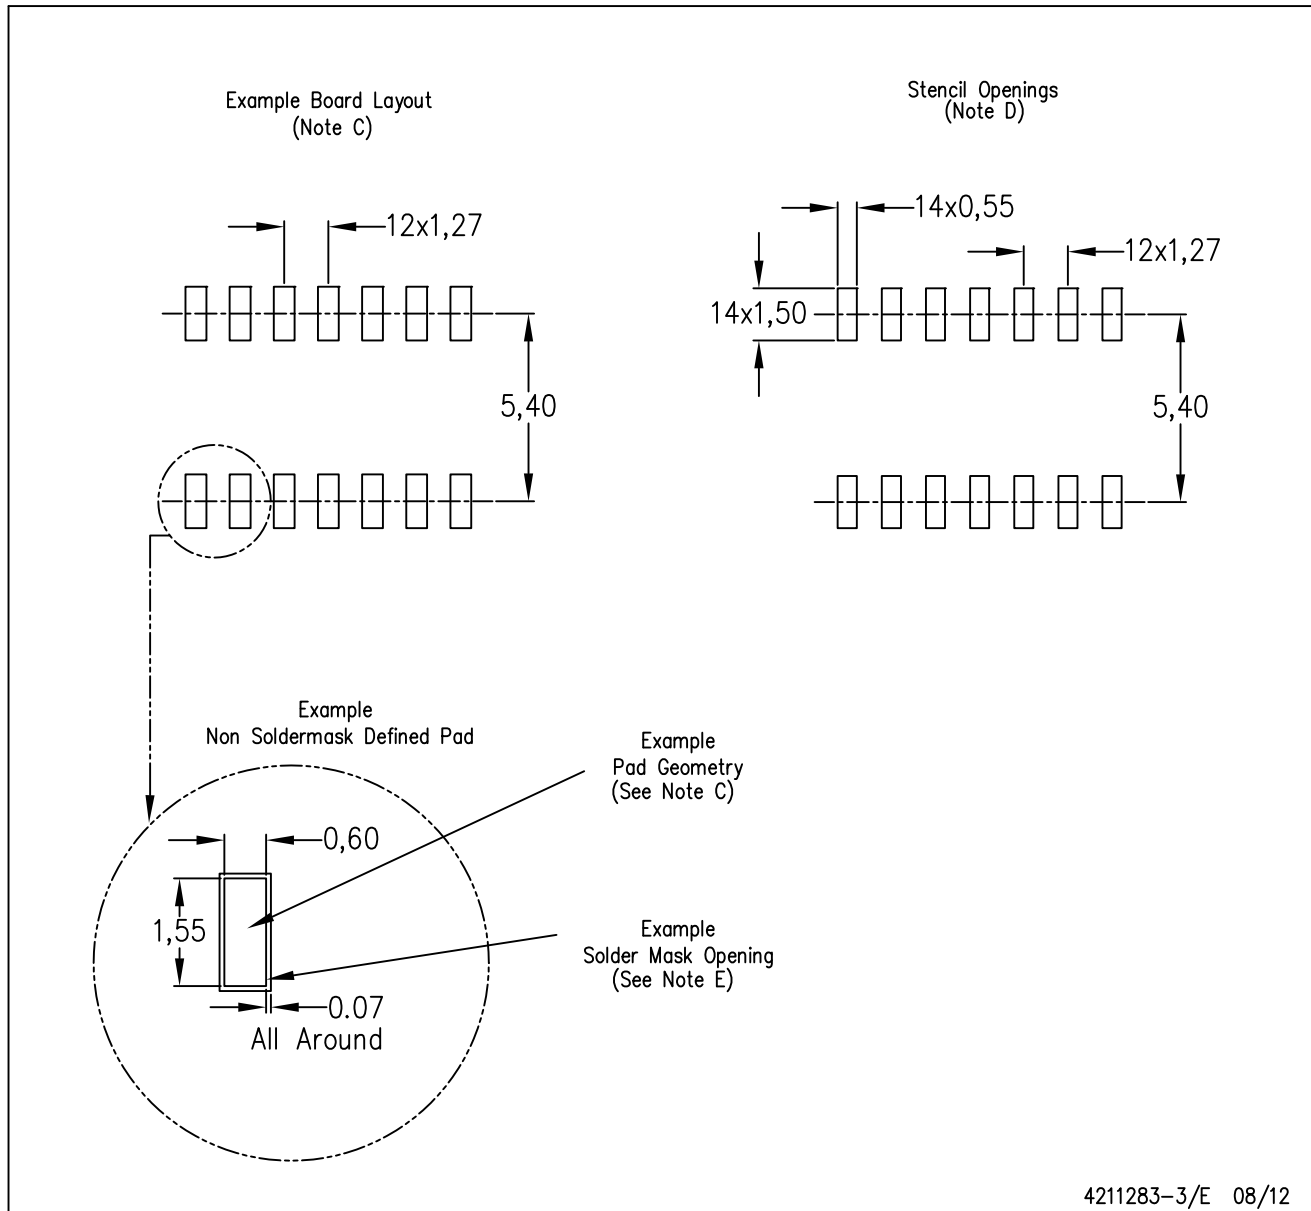

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

RSA (S-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

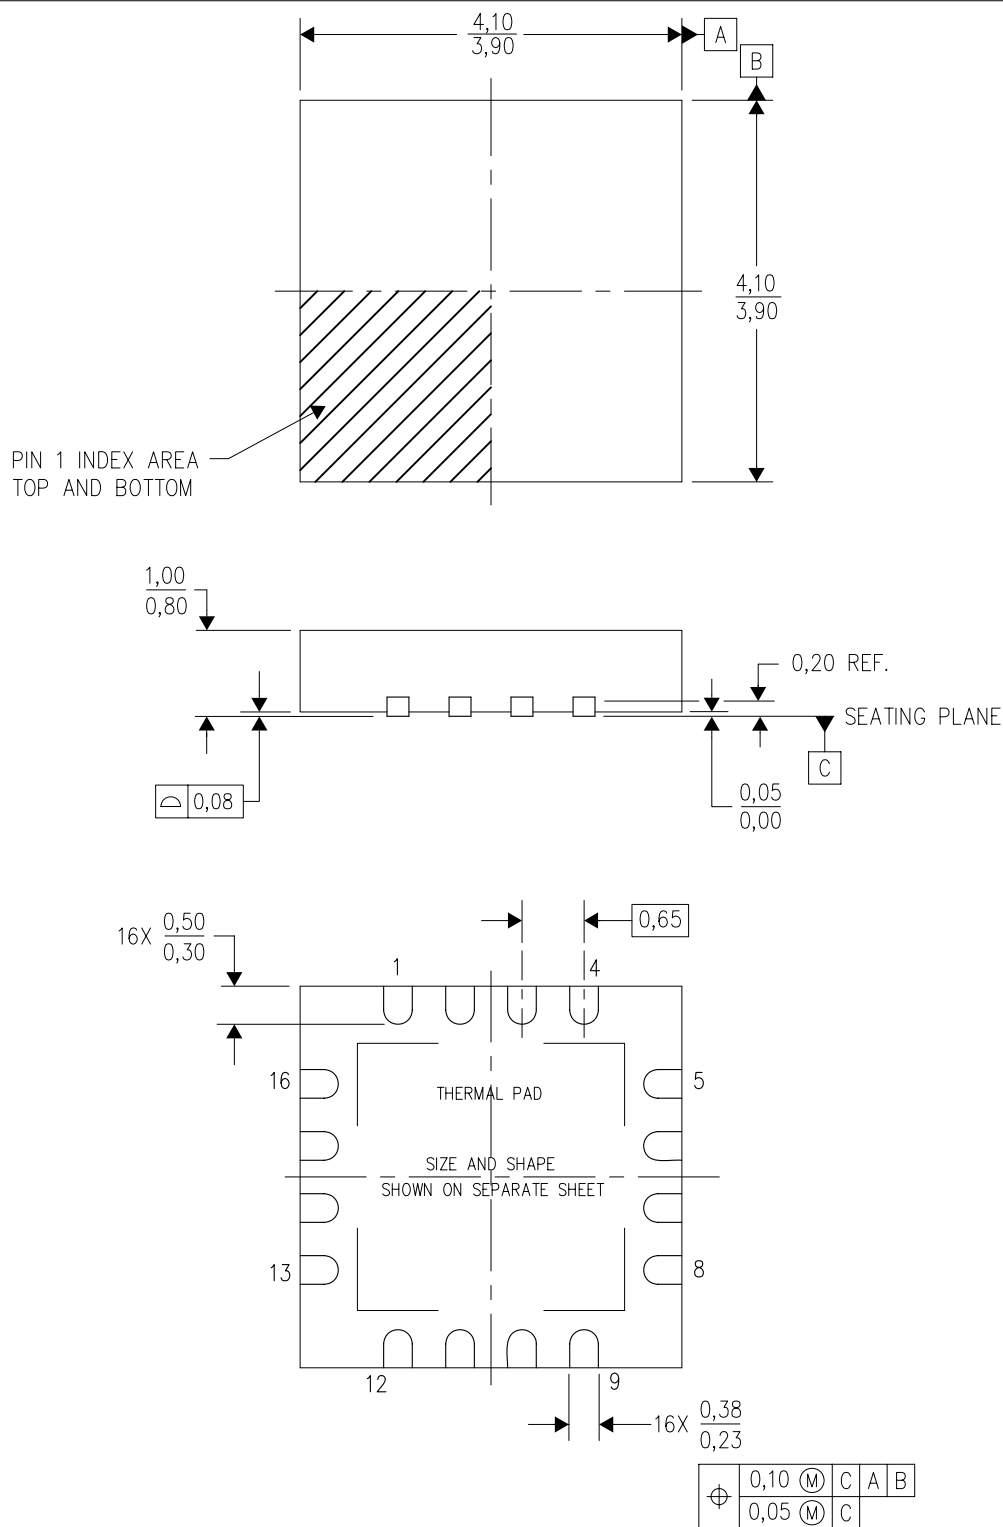

4205141/D 06/11

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - This drawing is subject to change without notice.
  - Quad Flatpack, No-leads (QFN) package configuration.
  - The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
  - Falls within JEDEC MO-220.

RSA (S-PVQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

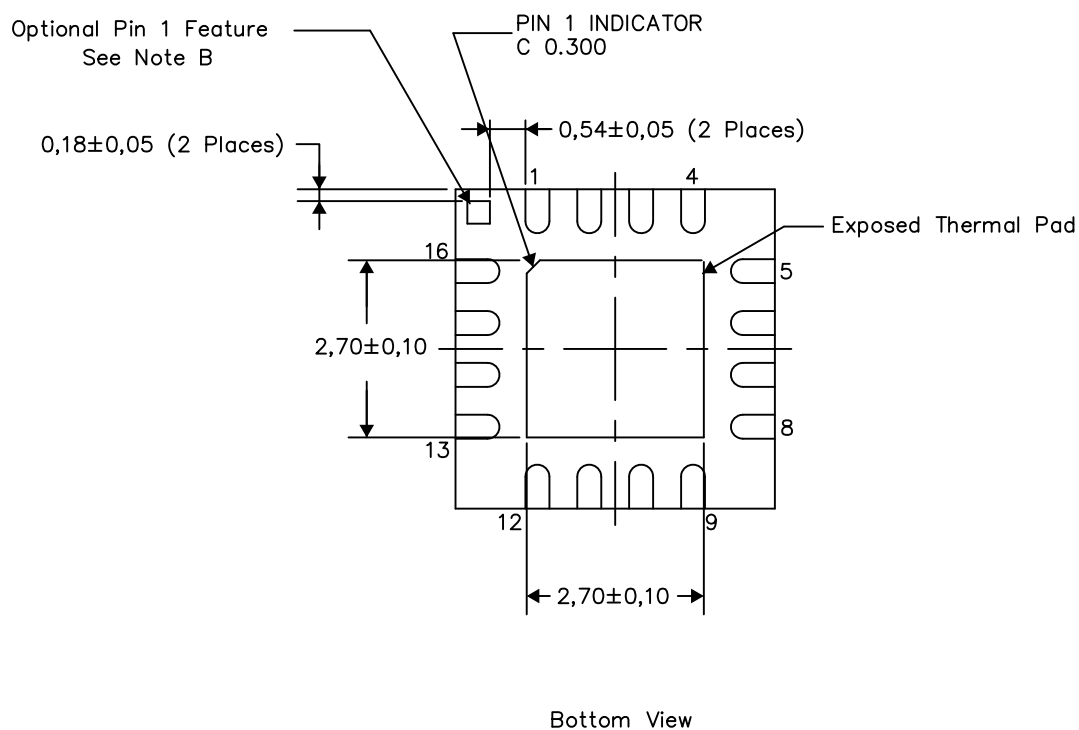

Exposed Thermal Pad Dimensions


4206364/L 08/12

## NOTES:

- A. All linear dimensions are in millimeters
- B. The Pin 1 Identification mark is an optional feature that may be present on some devices  
In addition, this Pin 1 feature if present is electrically connected to the center thermal pad and therefore should be considered when routing the board layout.

RSA (S-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

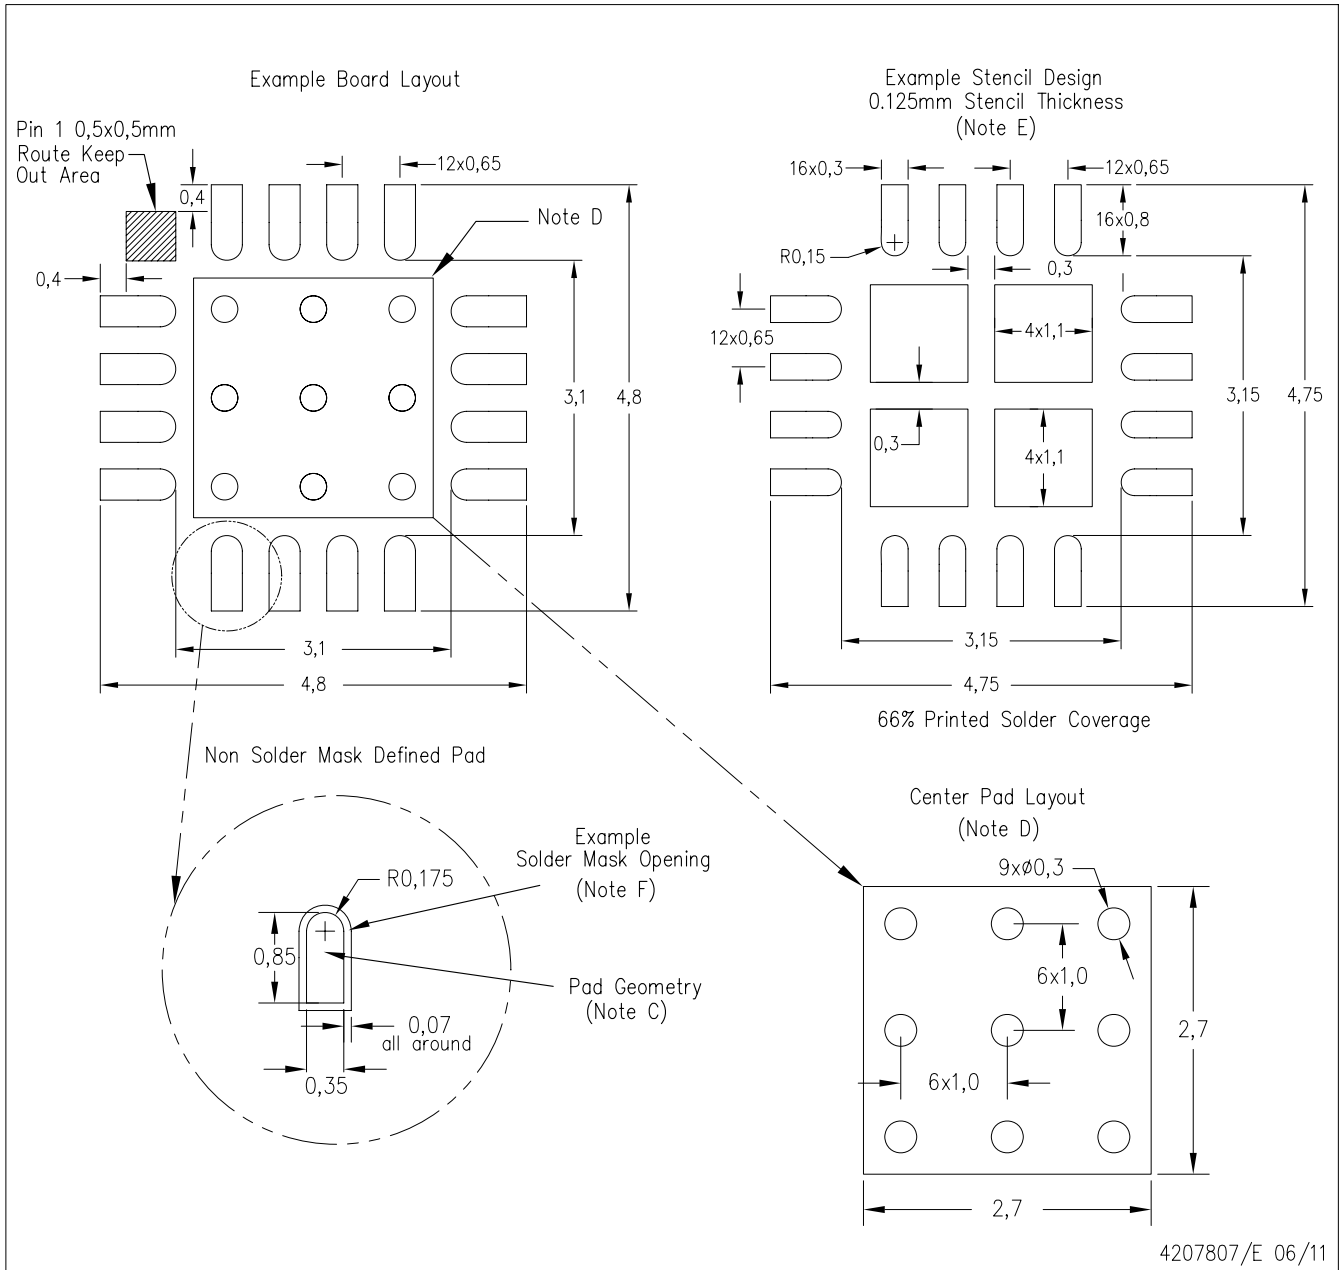

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for solder mask tolerances.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)