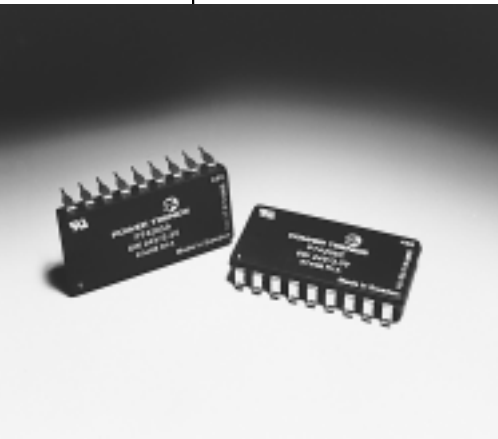



PT4205 Series**3-7 WATT 24V INPUT
ISOLATED DC-DC CONVERTER****Revised 5/15/98**

- Wide Input Voltage Range: 18V to 36V
- 84% Efficiency
- 1,500 VDC Isolation
- 18 Pin - DIP Package
- 3.5 Million Hour MTBF
- Meets FCC/EN55022 Class A
- UL and CSA approved
- No External Components Required
- Adjustable Output Voltage

Power Trends' PT4205 series of isolated DC to DC converters advance the state-of-the-art for board-mounted converters by employing high switching frequencies, thick-film technology and a high degree of silicon integration. The high reliability and very low package height makes these converters ideal for Telecom and Datacom applications requiring input-to-output isolation with board spacing down to 0.6".

The PT4205 series is offered in a unique molded through-hole or SMD-DIP package with single output voltages of 3.3V and 5V.

Standard Application**Specifications**

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT4205 SERIES				Units
			Min	Typ	Max		
Output Current	I _o	Over V _{in} range	V _o = 3.3V V _o = 5V	0 0	— —	1.8 1.2	A
Current Limit	I _{cl}	V _{in} = 24V	V _o = 3.3V V _o = 5V	2.0 1.3	— 1.6	3.0 2.4	A
On/Off Standby Current	I _{in standby}	V _{in} = 24V; Pin 11 = -V _{in}	—	0.5	—	—	mA
Short Circuit Current	I _{sc}	V _{in} = 24V	V _o = 3.3V V _o = 5V	— —	2.5 2.0	— —	A
Inrush Current	I _{ir} t _{ir}	V _{in} = 24V @ max I _o On start-up	—	0.6 1.0	1.0 2.0	— —	A mSec
Input Voltage Range	V _{in}	Over I _o Range	18**	24	36	—	V
Output Voltage Tolerance	ΔV _o	Over I _o Range	—	±4	—	—	%V _o
Idling Voltage	V _o	I _o = 0A	V _o = 3.3V V _o = 5V	— —	3.65 5.6	4.0 6.0	V
Ripple Rejection	RR	Over V _{in} range @ 120 Hz	—	60	—	—	dB
Line Regulation	Reg _{line}	Over V _{in} range @ max I _o	—	±0.5	—	—	%V _o
Load Regulation	Reg _{load}	10% to 100% of I _o max	—	±3	—	—	%V _o
V _o Ripple/Noise	V _n	V _{in} =24V, I _o =I _o max	—	30	70	—	mV _{pp}
Transient Response	t _{tr}	50% load change V _o over/undershoot	— —	100 3.0	300 5.0	— —	μSec %V _o
Efficiency	η	V _{in} =24V, I _o =1.8A, V _o =3.3V V _{in} =24V, I _o =1.2A, V _o =5V	— —	79 84	— —	— —	% %
Switching Frequency	f _o	Over V _{in} and I _o	520	—	688	—	kHz
Pin Temperature	T _p	@ Pin 1	—	—	+95	—	°C
Operating Temperature	T _a	V _{in} = 24V @ max I _o Free air convection, (40-60LFM)	-40	—	+85	—	°C
Storage Temperature	T _s	—	-55	—	+125	—	°C
Mechanical Shock	—	Per Mil-STD-202F, Method 213B, 6mS, half-sine, mounted to a PCB	—	50	—	—	G's
Mechanical Vibration	—	Per Mil-STD-202F, Method 204D, 10-500Hz, mounted to a PCB	—	10	—	—	G's
Weight	—	—	—	20	—	—	grams
Isolation	—	—	1500	—	—	—	VDC
Flammability	—	Materials meet UL 94V-0	—	—	—	—	—

** Minimum input voltage is adjustable - See application note.

Pin-Out Information

Pin	Function
1	V _{out}
2	V _{out} return
3	Do not connect
4	Do not connect
5	Do not connect
6	Do not connect
7	Sync input
8*	V _{adj}
9*	Nominal output voltage resistor
10	Turn-on/off input voltage adjust
11	Remote on/off
12	Do not connect
13	Do not connect
14	Do not connect
15	Do not connect
16	Do not connect
17	+V _{in}
18	-V _{in}

* Please note that when the V_{out} adjust is not used, pin 8 must be connected to pin 9.

Ordering Information**Through-Hole**

PT4205A = 3.3V/1.8A

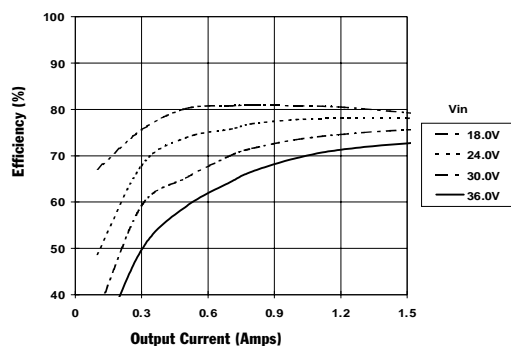
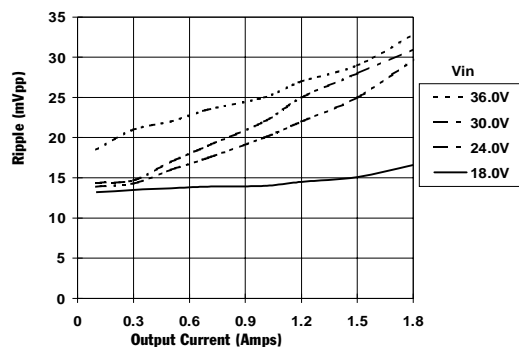
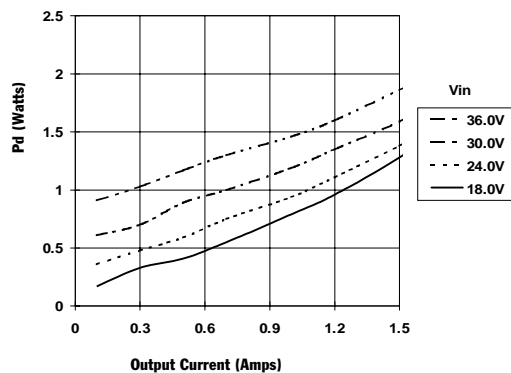
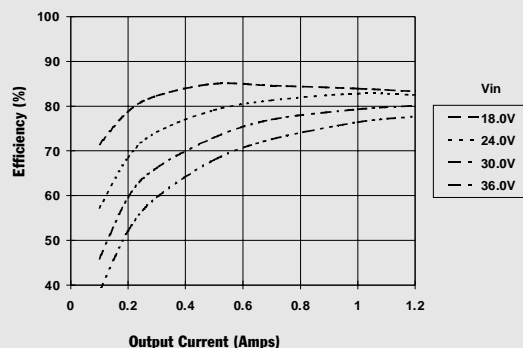
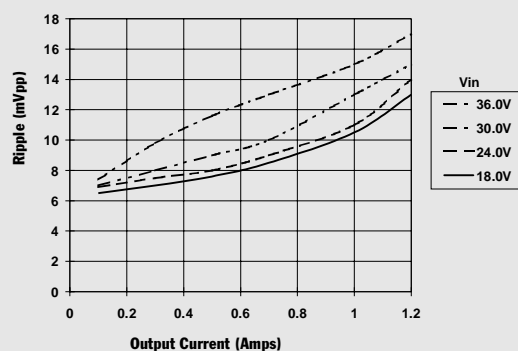
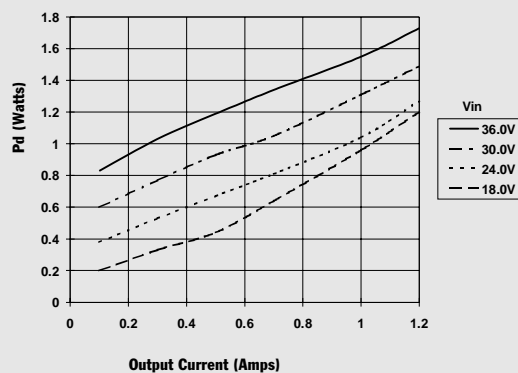
PT4206A = 5V/1.2A

Surface Mount

PT4205C = 3.3V/1.8A

PT4206C = 5V/1.2A

(For dimensions and PC board layout, see Package Style 900.)

PT4205 Series**CHARACTERISTIC DATA****PT4205, 3.3 VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Power Dissipation vs Output Current****PT4206 5.0 VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Power Dissipation vs Output Current**

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the isolated DC-DC converter.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.