


Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers

Major Ratings and Characteristics

$I_{F(AV)}$	1.5 A
V_{RRM}	50 V to 1000 V
I_{FSM}	50 A
I_R	5 μ A
V_F	1.1 V
T_j max.	150 °C

Case Style DFS



Features

- UL Recognition, file number E54214
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020C

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for SMPS, Lighting Ballaster, Adapter, Battery Charger, Home Appliances, Office Equipment, and Telecommunication applications

Mechanical Data

Case: DFS

Epoxy meets UL-94V-0 Flammability rating

Terminals: Matte tin plated (E3 Suffix) leads, solderable per J-STD-002B and MIL-STD-750, Method 2026

Polarity: As marked on body

Maximum Ratings

($T_A = 25$ °C unless otherwise noted)

Parameter	Symbol	DF 15005S	DF 1501S	DF 1502S	DF 1504S	DF 1506S	DF 1508S	DF 1510S	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward output rectified current at $T_A = 40$ °C ⁽²⁾	$I_{F(AV)}$	1.5							A
Peak forward surge current single half sine-wave superimposed on rated load	I_{FSM}	50							A
Rating for fusing ($t < 8.3$ ms)	I^2t	10							A ² sec
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150							°C

Electrical Characteristics

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Parameter	Test condition	Symbol	DF 15005S	DF 1501S	DF 1502S	DF 1504S	DF 1506S	DF 1508S	DF 1510S	Unit
Max. instantaneous forward voltage drop per leg	at 1.5 A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage per leg	$T_A = 25\text{ }^{\circ}\text{C}$ $T_A = 125\text{ }^{\circ}\text{C}$	I_R	5.0 500							μA
Typical junction capacitance per leg ⁽¹⁾		C_J	25							pF

Thermal Characteristics

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	DF 15005S	DF 1501S	DF 1502S	DF 1504S	DF 1506S	DF 1508S	DF 1510S	Unit
Typical thermal resistance per leg ⁽²⁾	$R_{\theta JA}$ $R_{\theta JL}$	40 15							$^{\circ}\text{C/W}$

Notes:

(1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Units mounted on P.C.B. with 0.51 x 0.51" (13 x 13 mm) copper pads

Ratings and Characteristics Curves

($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

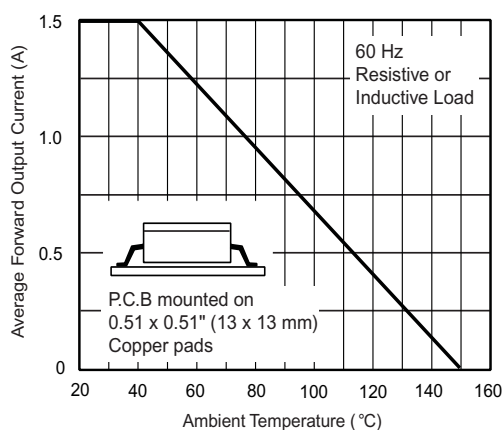


Figure 1. Derating Curve Output Rectified Current

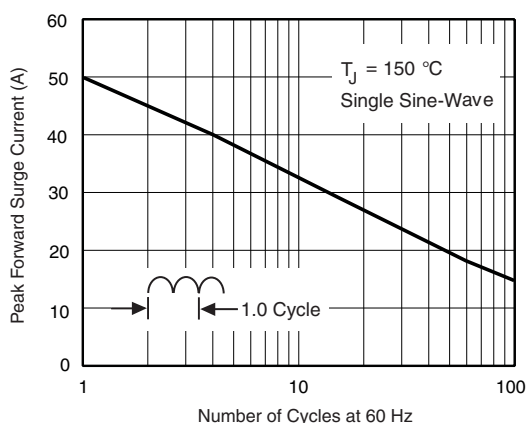


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

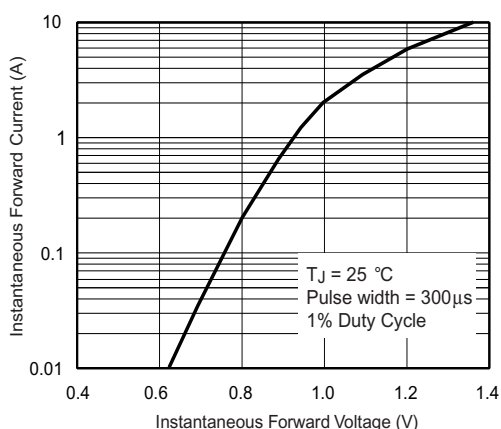


Figure 3. Typical Forward Characteristics Per Leg

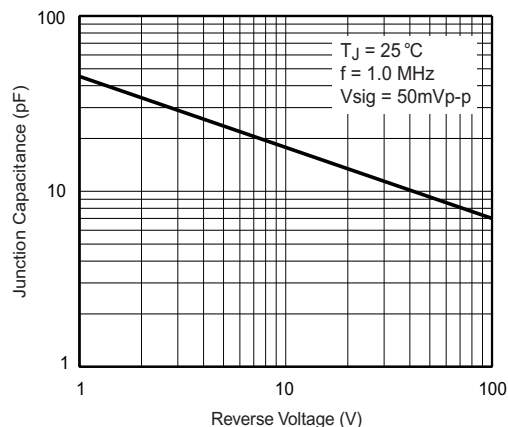


Figure 5. Typical Junction Capacitance Per Leg

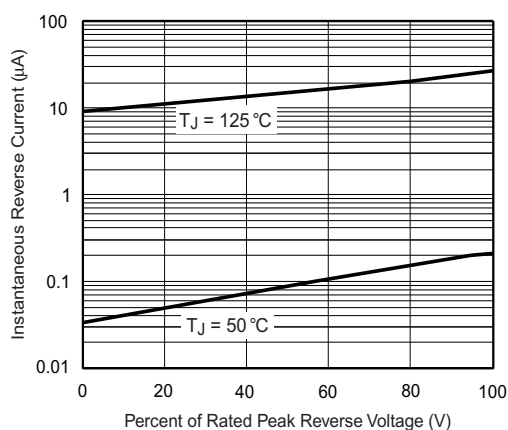


Figure 4. Typical Reverse Leakage Characteristics Per Leg

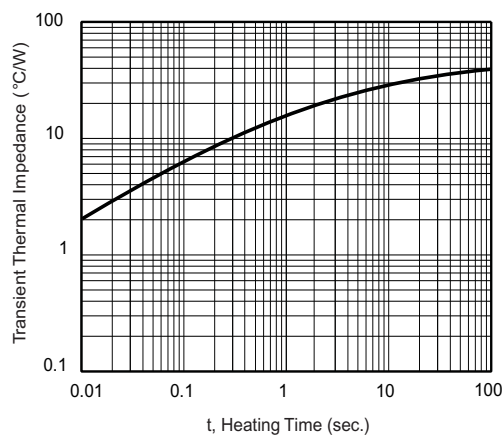


Figure 6. Typical Transient Thermal Impedance

Package outline dimensions in inches (millimeters)

